


THIS DRAWING AND THE INFORMATION DISCLOSED HEREIN ARE PROPRIETARY DATA OF INTERCONNECT SOLUTIONS INC. AND IS TO BE USED FOR REFERENCE ONLY. REPRODUCTION OF THIS DRAWING OR THE INFORMATION CONTAINED HEREIN IS PROHIBITED WITHOUT THE EXPRESSED WRITTEN APPROVAL OF ISI.

REVISIONS

REV	DESCRIPTION	DATE	APPD
-----	-------------	------	------

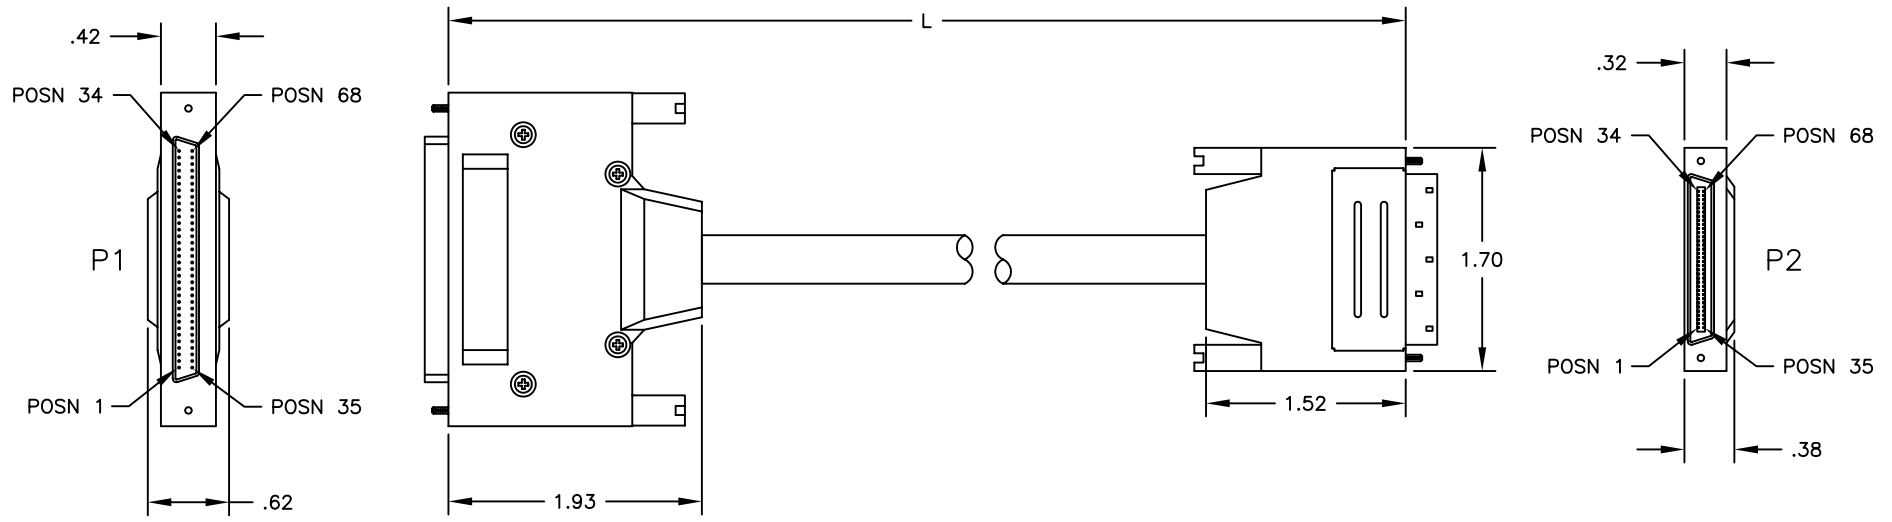

6. CABLE MUST BE 100% ELECTRICALLY TESTED.
5. CABLE MUST WITHSTAND 35LBS OF PULL AT STRAIN RELIEF WITH NO EVIDANCE OF DAMAGE OR SLIPPAGE.
4. MALE THUMBSCREWS HAVE .256 THREADS (X4).
3. ALL U160/U320 ASSEMBLIES BUILT WITH 30AWG MADISON SCSI CABLES
2. 100% SHIELDING FROM P1 TO P2 END.
1. SEE SHEET 2 FOR WIRING SCHEMATIC.

5 METER	$\pm\frac{30}{-00}$ CM	ICE230002B005M
2 METER	$\pm\frac{20}{-00}$ CM	ICE230002B002M
1 METER	$\pm\frac{10}{-00}$ CM	ICE230002B001M
DIM "L"		PART NUMBER

DWN	H. SETH 2/20/2002
CHK	
APVD	

INTERCONNECT SOLUTIONS INC.
 17191 Armstrong Ave. Phone (949) 261-0990
 Irvine, CA 92614 Fax (949) 261-0555

TITLE
 CABLE ASSEMBLY, OFFSET HD68 TO OFFSET VHDCI, U160/U320

TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSION ARE IN INCHES		SIZE	NUMBER
DECIMALS	FRACTIONS $\pm\frac{1}{64}$	B	ICE230002BXXXX
X $\pm.100$	ANGLES $\pm\frac{1}{2}^\circ$	SCALE NONE	SHEET 1 of 2
XX $\pm.010$			
XXX $\pm.005$			